


## 逆T式擁壁

H-1000~3000

Aタイプ(レキ質土用)・Bタイプ(砂質土用)

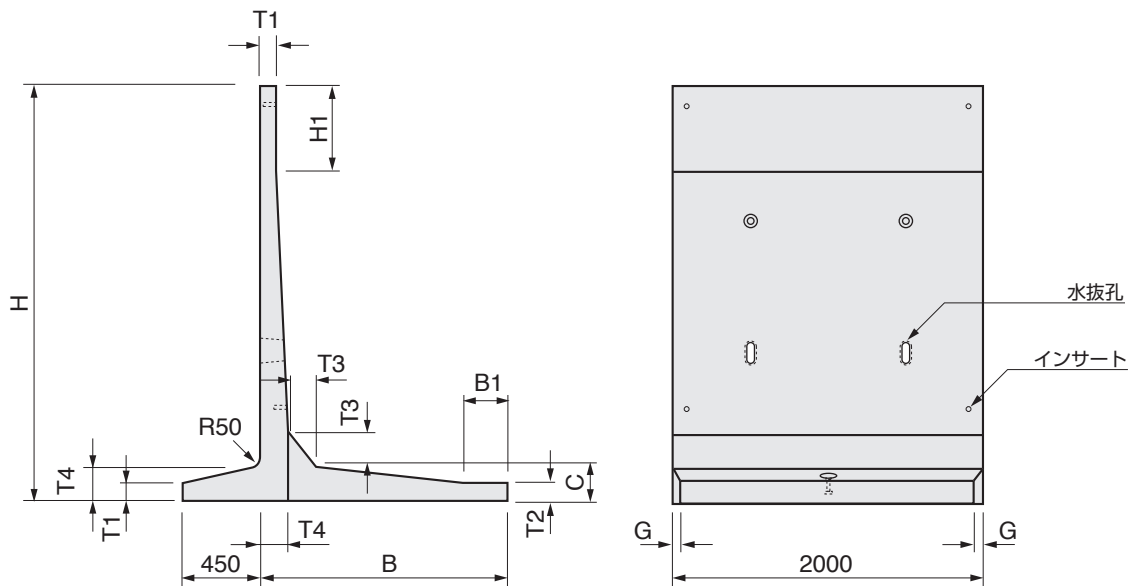

呼び名	寸法(mm)										参考質量(kg)
	H	B	H1	B1	T1	T2	T3	T4	G		
1000	A	1000	600	250	-		102	110	110	16	1013
	B	1000	750	250	60		100	110	110	22	1085
1500	A	1500	800	750	110		100	110	110	23	1349
	B	1500	1000	750	310		100	110	110	30	1445
2000	A	2000	1000	750	-	100	106	150	150	28	2011
	B	2000	1200	750	110		100	150	150	36	2017
2500	A	2500	1150	750	-		116	180	180	32	2702
	B	2500	1450	750	110		100	180	180	43	2856
3000	A	3000	1300	750	-		133	200	220	36	3610
	B	3000	1650	750	10		100	200	220	48	3806

●転落防止柵用基礎付タイプも製造可能です。(内基礎付)

## 砂質土(Bタイプ)での必要地盤反力の比較

L型擁壁			
寸法(mm)		底版反力(kN/m <sup>2</sup> )	
壁高	底版幅B	Qmax	Qmin
1000	850	46.64	12.43
2000	1450	86.23	11.45
3000	2050	125.58	11.36

逆T式擁壁			
寸法(mm)		底版反力(kN/m <sup>2</sup> )	
壁高	底版幅B	Qmax	Qmin
1000	750	29.17	8.96
2000	1200	37.83	34.92
3000	1650	75.79	33.83

