
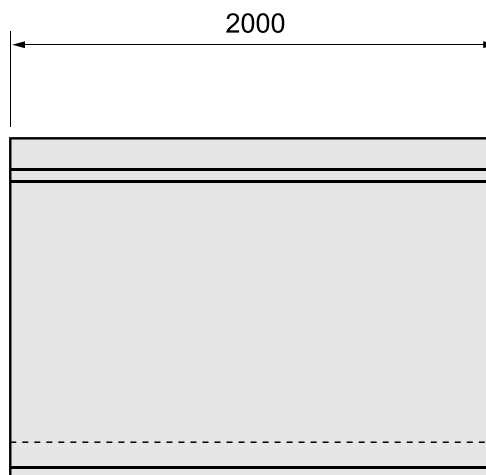


農業土木事業協会規格

鉄筋コンクリート大型フリューム



農業土木事業協会規格

張り出し無しタイプ

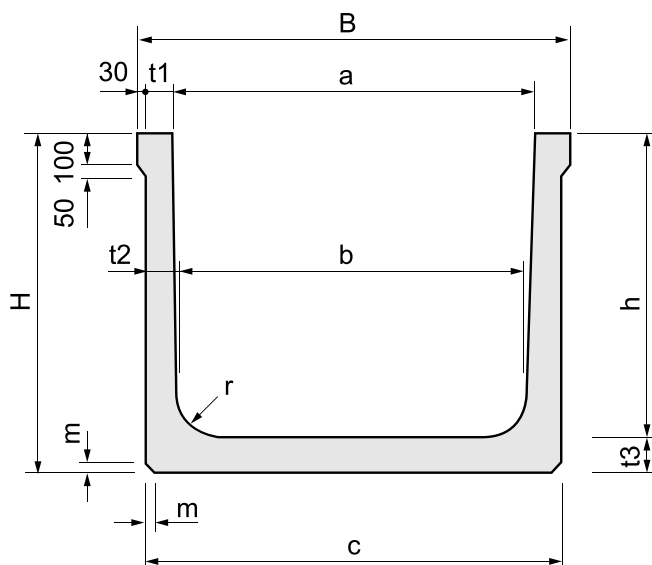

● ウィーブホールも取付可能です。

張り出し有りタイプ（浮力対応型）

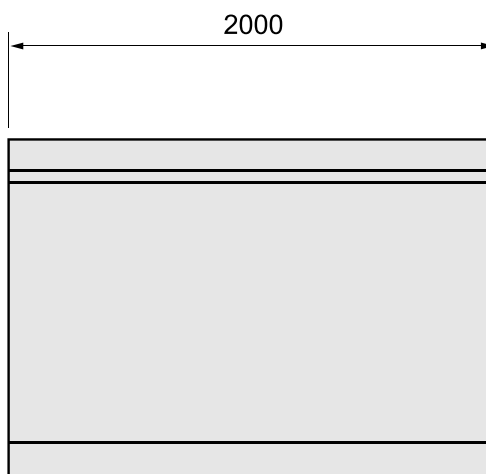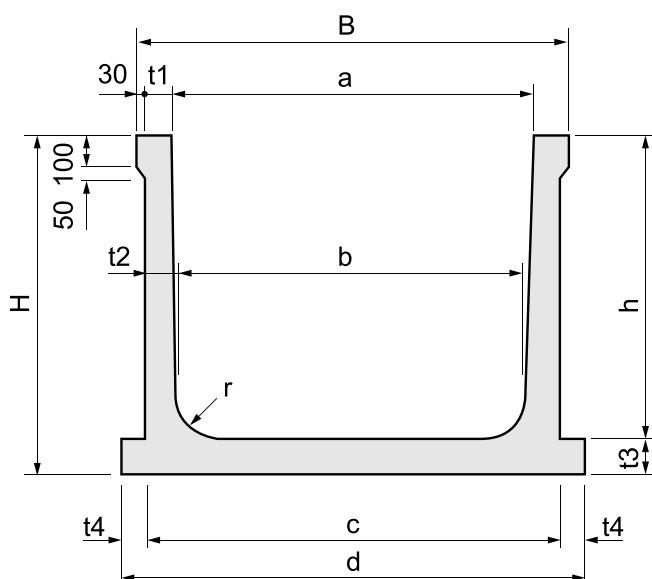


● ウィーブホールも取付可能です。




鉄筋コンクリート大型フリューム

h-700~900

張り出し無しタイプ

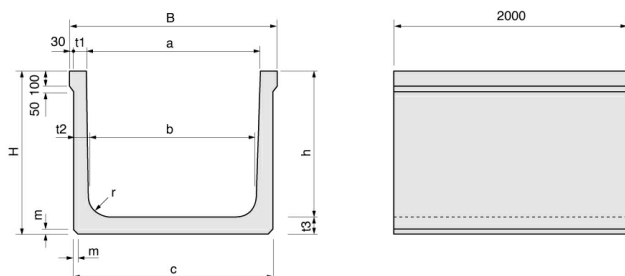

張り出し有りタイプ（浮力対応型）

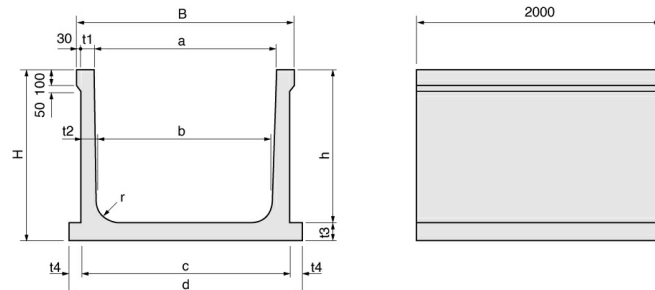

呼び名		寸法 (mm)										参考質量 (kg)	
h (深) × a (幅)	H	h	a	B	b	c	d	t1	t2, t3	t4	r	張り出し無しタイプ	張り出し有りタイプ
700	600		600	800	550	740						930	
	700		700	900	650	840						970	
	800		800	1000	750	940						1020	
	900		900	1100	850	1040	-			-		1060	-
	1000		1000	1200	950	1140						1100	
	1100		1100	1300	1050	1240						1150	
	1200		1200	1400	1150	1340						1190	
	1300	795	700	1300	1500	1250	1440	1540	70	95	100	1240	1290
	1400			1400	1600	1350	1540	1640		50		1280	1330
	1500			1500	1700	1450	1640	1740				1330	1380
	1600			1600	1800	1550	1740	1840				1370	1420
	1700			1700	1900	1650	1840	2040				1420	1510
	1800			1800	2000	1750	1940	2140		100		1460	1560
	1900			1900	2100	1850	2040	2240				1510	1600
	2000			2000	2200	1950	2140	2340				1550	1650
800	600			600	800	550	740					1010	
	700			700	900	650	840					1050	
	800			800	1000	750	940					1100	
	900			900	1100	850	1040	-		-		1140	-
	1000			1000	1200	950	1140					1180	
	1100			1100	1300	1050	1240					1230	
	1200			1200	1400	1150	1340	1440				1270	1320
	1300	895	800	1300	1500	1250	1440	1540	70	95	100	1320	1360
	1400			1400	1600	1350	1540	1640		50		1360	1410
	1500			1500	1700	1450	1640	1740				1410	1450
	1600			1600	1800	1550	1740	1940				1450	1550
	1700			1700	1900	1650	1840	2040				1490	1590
	1800			1800	2000	1750	1940	2140		100		1540	1640
	1900			1900	2100	1850	2040	2240				1580	1680
	2000			2000	2200	1950	2140	2340				1630	1720
900	600			600	810	550	750					1150	
	700			700	910	650	850					1190	
	800			800	1010	750	950	-		-		1240	-
	900			900	1110	850	1050					1290	
	1000			1000	1210	950	1150					1330	
	1100			1100	1310	1050	1250					1380	
	1200			1200	1410	1150	1350	1450				1430	1480
	1300	1000	900	1300	1510	1250	1450	1550	75	100	100	1480	1530
	1400			1400	1610	1350	1550	1650		50		1520	1570
	1500			1500	1710	1450	1650	1750				1570	1620
	1600			1600	1810	1550	1750	1850				1620	1720
	1700			1700	1910	1650	1850	2050				1660	1760
	1800			1800	2010	1750	1950	2150		100		1710	1810
	1900			1900	2110	1850	2050	2250				1760	1860
	2000			2000	2210	1950	2150	2350				1800	1900

●張り出し長t4は農業土木事業協会型 浮力安全率1.1以上をベースとしたものです。●排水用の場合は水抜きがつきます。


●上記以外のサイズについてはお問い合わせください。




鉄筋コンクリート大型フリューム

h-1000・1100

張り出し無しタイプ

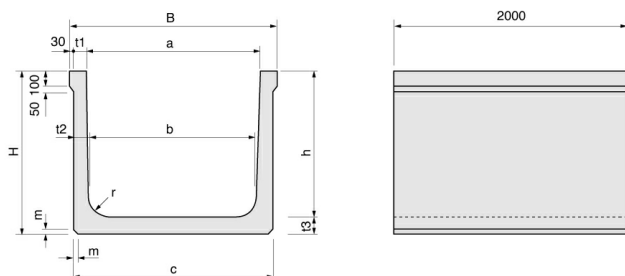

張り出し有りタイプ（浮力対応型）

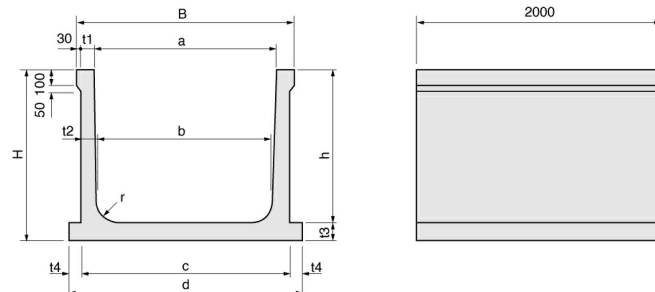

呼び名		寸 法 (mm)											参考質量 (kg)	
h (深) × a (幅)		H	h	a	B	b	c	d	t1	t2,t3	t4	r	張出し無し タイプ	張出し有り タイプ
1000	600			600	810	530	750						1330	
	700			700	910	630	850						1390	
	800			800	1010	730	950						1440	
	900			900	1110	830	1050	-			-		1490	-
	1000			1000	1210	930	1150						1540	
	1100			1100	1310	1030	1250						1590	
	1200			1200	1410	1130	1350						1650	
	1300	1110	1000	1300	1510	1230	1450	1550	75	110		150	1700	1750
	1400			1400	1610	1330	1550	1650					1750	1800
	1500			1500	1710	1430	1650	1750			50		1800	1860
	1600			1600	1810	1530	1750	1850					1850	1910
	1700			1700	1910	1630	1850	2050					1900	2010
	1800			1800	2010	1730	1950	2150					1960	2060
	1900			1900	2110	1830	2050	2250			100		2010	2120
2000			2000	2210	1930	2150	2350					2060	2170	
1100	600			600	820	530	760						1490	
	700			700	920	630	860						1550	
	800			800	1020	730	960						1600	
	900			900	1120	830	1060						1660	
	1000			1000	1220	930	1160						1710	
	1100			1100	1320	1030	1260						1770	
	1200			1200	1420	1130	1360						1820	
	1300			1300	1520	1230	1460						1880	
	1400			1400	1620	1330	1560	1660					1930	1980
	1500	1215	1100	1500	1720	1430	1660	1760	80	115	50	150	1980	2040
	1600			1600	1820	1530	1760	1860					2040	2090
	1700			1700	1920	1630	1860	1960					2090	2150
	1800			1800	2020	1730	1960	2160					2140	2260
	1900			1900	2120	1830	2060	2260					2200	2310
	2000			2000	2220	1930	2160	2360			100		2250	2360
	2100			2100	2320	2030	2260	2460					2310	2420
	2200			2200	2420	2130	2360	2560					2360	2470
	2300			2300	2520	2230	2460	2760					2420	2590
	2400			2400	2620	2330	2560	2860			150		2470	2640
	2500			2500	2720	2430	2660	1960					2520	2690

●張り出し長t4は農業土木事業協会型 浮力安全率1.1以上をベースとしたものです。●排水用の場合は水抜きがつきます。


●上記以外のサイズについてはお問い合わせください。




鉄筋コンクリート大型フリューム

h-1200・1300

張り出し無しタイプ

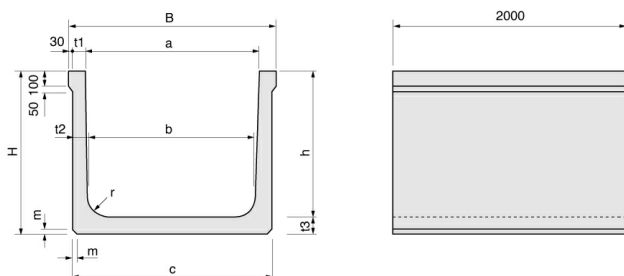

張り出し有りタイプ（浮力対応型）

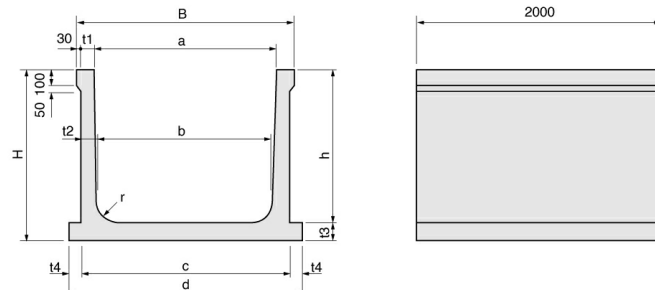

呼び名		寸 法 (mm)											参考質量 (kg)	
h (深) × a (幅)	H	h	a	B	b	c	d	t1	t2,t3	t4	r	張出し無し タイプ	張出し有り タイプ	
1200	600			600	830	520	770					1720		
	700			700	930	620	870					1780		
	800			800	1030	720	970					1840		
	900			900	1130	820	1070					1900		
	1000			1000	1230	920	1170	-		-		1960	-	
	1100			1100	1330	1020	1270					2020		
	1200			1200	1430	1120	1370					2080		
	1300			1300	1530	1220	1470					2130		
	1400			1400	1630	1320	1570					2190		
	1500	1325	1200	1500	1730	1420	1670	1770	85	125		150	2250	2320
	1600			1600	1830	1520	1770	1870			50		2310	2370
	1700			1700	1930	1620	1870	1970					2370	2430
	1800			1800	2030	1720	1970	2070					2430	2490
	1900			1900	2130	1820	2070	2270					2490	2610
	2000			2000	2230	1920	2170	2370					2550	2670
	2100			2100	2330	2020	2270	2470			100		2600	2730
	2200			2200	2430	2120	2370	2570					2660	2790
	2300			2300	2530	2220	2470	2670					2720	2850
	2400			2400	2630	2320	2570	2870					2780	2970
	2500			2500	2730	2420	2670	2970			150		2840	3020
1300	600			600	850	510	790					2040		
	700			700	950	610	890					2110		
	800			800	1050	710	990					2180		
	900			900	1150	810	1090					2240		
	1000			1000	1250	910	1190					2310		
	1100			1100	1350	1010	1290	-		-		2370	-	
	1200			1200	1450	1110	1390					2440		
	1300			1300	1550	1210	1490					2510		
	1400			1400	1650	1310	1590					2570		
	1500			1500	1750	1410	1690					2640		
	1600			1600	1850	1510	1790					2700		
	1700			1700	1950	1610	1890	1990				2770	2840	
	1800	1440	1300	1800	2050	1710	1990	2090	95	140	50	150	2830	2900
	1900			1900	2150	1810	2090	2190					2900	2970
	2000			2000	2250	1910	2190	2390					2970	3100
	2100			2100	2350	2010	2290	2490					3030	3170
	2200			2200	2450	2110	2390	2590			100		3100	3230
	2300			2300	2550	2210	2490	2690					3160	3300
	2400			2400	2650	2310	2590	2790					3230	3370
	2500			2500	2750	2410	2690	2890					3290	3430
2600			2600	2850	2510	2790	3090					3360	3560	
2700			2700	2950	2610	2890	3190			150		3430	3630	
2800			2800	3050	2710	2990	3290					3490	3690	
2900			2900	3150	2810	3090	3390					3560	3760	
3000			3000	3250	2910	3190	3590			200		3620	3890	

●張り出し長t4は農業土木事業協会型 浮力安全率1.1以上をベースとしたものです。●排水用の場合は水抜きがつきます。


●上記以外のサイズについてはお問い合わせください。




鉄筋コンクリート大型フリューム

h-1400・1500

張り出し無しタイプ

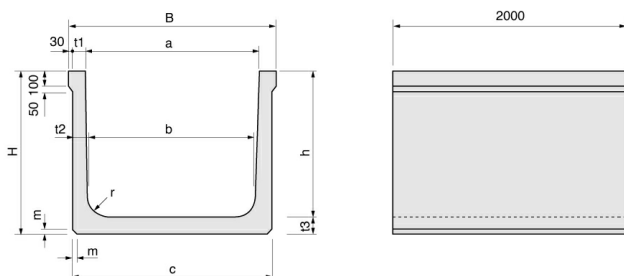

張り出し有りタイプ（浮力対応型）

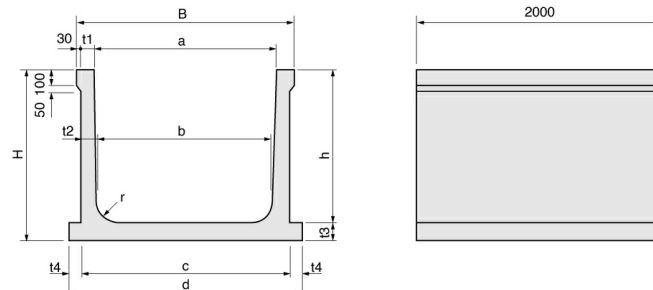

呼び名		寸法 (mm)										参考質量 (kg)	
h (深) × a (幅)	H	h	a	B	b	c	d	t1	t2, t3	t4	r	張り出し無しタイプ	張り出し有りタイプ
1400	1550	1400	800	1070	710	1010						2480	
			900	1170	810	1110						2550	
			1000	1270	910	1210						2620	
			1100	1370	1010	1310						2690	
			1200	1470	1110	1410						2760	
			1300	1570	1210	1510						2830	
			1400	1670	1310	1610						2900	
			1500	1770	1410	1710						2970	
			1600	1870	1510	1810						3040	
			1700	1970	1610	1910						3110	
			1800	2070	1710	2010	2110					3180	3260
			1900	2170	1810	2110	2210	105	150	50	150	3250	3330
			2000	2270	1910	2210	2310					3320	3400
			2100	2370	2010	2310	2410					3390	3470
			2200	2470	2110	2410	2610					3460	3610
			2300	2570	2210	2510	2710					3530	3680
			2400	2670	2310	2610	2810			100		3600	3750
			2500	2770	2410	2710	2910					3680	3820
			2600	2870	2510	2810	3010					3750	3890
			2700	2970	2610	2910	3210					3820	4040
			2800	3070	2710	3010	3310			150		3890	4110
			2900	3170	2810	3110	2410					3960	4180
1500	1660	1500	3000	3270	2910	3210	3510					4030	4250
			1000	1280	900	1220						2980	
			1100	1380	1000	1320						3060	
			1200	1480	1100	1420						3130	
			1300	1580	1200	1520						3210	
			1400	1680	1300	1620	-			-		3290	-
			1500	1780	1400	1720						3360	
			1600	1880	1500	1820						3440	
			1700	1980	1600	1920						3510	
			1800	2080	1700	2020						3590	
			1900	2180	1800	2120	2220					3660	3740
			2000	2280	1900	2220	2320	110	160	50	250	3740	3820
			2100	2380	2000	2320	2420					3810	3890
			2200	2480	2100	2420	2520					3890	3970
			2300	2580	2200	2520	2720					3960	4120
			2400	2680	2300	2620	2820					4040	4190
			2500	2780	2400	2720	2920			100		4110	4270
			2600	2880	2500	2820	3020					4190	4340
			2700	2980	2600	2920	3120					4260	4420
			2800	3080	2700	3020	3320			150		4340	4570
			2900	3180	2800	3120	3420					4410	4640
			3000	3280	2900	3220	3520					4490	4720

●張り出し長t4は農業土木事業協会型 浮力安全率1.1以上をベースとしたものです。●排水用の場合は水抜きがつきます。


●上記以外のサイズについてはお問い合わせください。




鉄筋コンクリート大型フリューム

h-1600・1700

張り出し無しタイプ

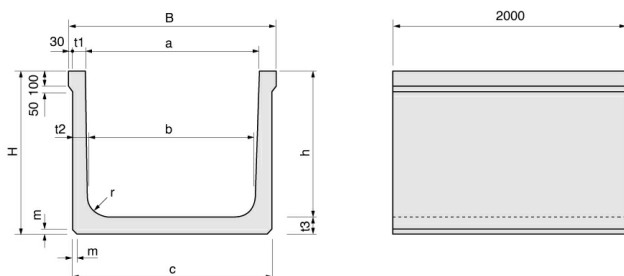

張り出し有りタイプ（浮力対応型）

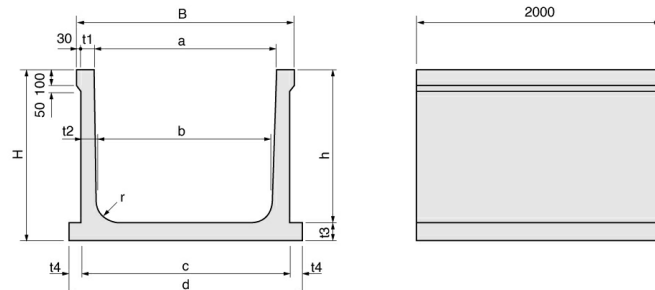

呼び名		寸法 (mm)										参考質量 (kg)	
h (深) × a (幅)	H	h	a	B	b	c	d	t1	t2, t3	t4	r	張り出し無しタイプ	張り出し有りタイプ
1600	1000		1000	1290	890	1230						3290	
	1100		1100	1390	990	1330						3370	
	1200		1200	1490	1090	1430						3450	
	1300		1300	1590	1190	1530						3530	
	1400		1400	1690	1290	1630						3610	
	1500		1500	1790	1390	1730						3690	
	1600		1600	1890	1490	1830						3770	
	1700		1700	1990	1590	1930						3850	
	1800		1800	2090	1690	2030						3930	
	1900		1900	2190	1790	2130						4010	
	2000	1770	1600	2000	2290	1890	2230	115	170		250	4090	4170
	2100			2100	2390	1990	2330			50		4170	4250
	2200			2200	2490	2090	2430					4250	4330
	2300			2300	2590	2190	2530					4330	4410
	2400			2400	2690	2290	2630					4410	4570
	2500			2500	2790	2390	2730					4490	4650
	2600			2600	2890	2490	2830			100		4570	4730
	2700			2700	2990	2590	2930					4650	4810
	2800			2800	3090	2690	3030					4730	4890
	2900			2900	3190	2790	3130			150		4810	5050
	3000			3000	3290	2890	3230					4890	5130
1700	1000			1000	1300	880	1240					3610	
	1100			1100	1400	980	1340					3690	
	1200			1200	1500	1080	1440					3780	
	1300			1300	1600	1180	1540					3860	
	1400			1400	1700	1280	1640					3950	
	1500			1500	1800	1380	1740					4030	
	1600			1600	1900	1480	1840					4120	
	1700			1700	2000	1580	1940					4200	
	1800			1800	2100	1680	2040					4290	
	1900			1900	2200	1780	2140					4370	
	2000	1880	1700	2000	2300	1880	2240	120	180			4460	
	2100			2100	2400	1980	2340					4540	4620
	2200			2200	2500	2080	2440			50		4620	4710
	2300			2300	2600	2180	2540					4710	4790
	2400			2400	2700	2280	2640					4790	4880
	2500			2500	2800	2380	2740					4880	5050
	2600			2600	2900	2480	2840					4960	5140
	2700			2700	3000	2580	2940					5050	5220
	2800			2800	3100	2680	3040			100		5130	5310
	2900			2900	3200	2780	3140					5220	5390
	3000			3000	3300	2880	3240					5300	5480

●張り出し長t4は農業土木事業協会型 浮力安全率1.1以上をベースとしたものです。●排水用の場合は水抜きがつきます。


●上記以外のサイズについてはお問い合わせください。




鉄筋コンクリート大型フリューム

h-1800・1900

張り出し無しタイプ

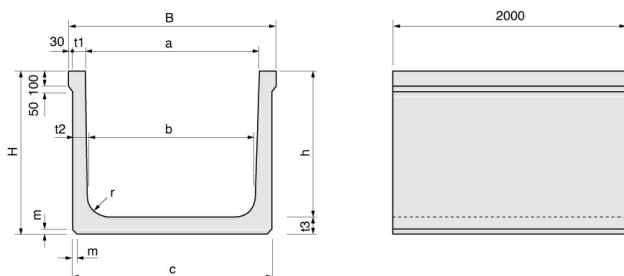

張り出し有りタイプ（浮力対応型）

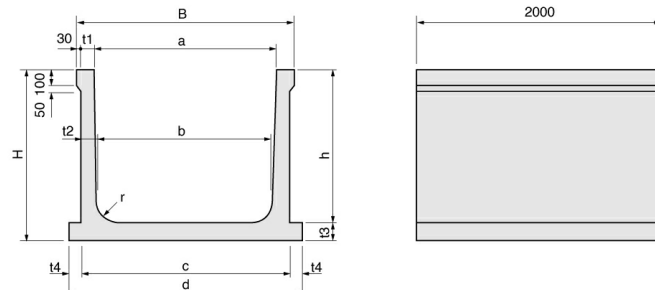

呼び名		寸 法 (mm)										参考質量 (kg)	
h (深) × a (幅)	H	h	a	B	b	c	d	t1	t2, t3	t4	r	張り出し無し タイプ	張り出し有り タイプ
1800	1980	1800	1000	1300	880	1240						3750	
			1100	1400	980	1340						3840	
			1200	1500	1080	1440						3920	
			1300	1600	1180	1540						4000	
			1400	1700	1280	1640						4090	
			1500	1800	1380	1740	-			-		4170	-
			1600	1900	1480	1840						4260	
			1700	2000	1580	1940						4340	
			1800	2100	1680	2040						4430	
			1900	2200	1780	2140						4510	
			2000	2300	1880	2240		120	180		250	4600	
			2100	2400	1980	2340	2440					4680	4770
			2200	2500	2080	2440	2540			50		4770	4860
			2300	2600	2180	2540	2640					4850	4940
			2400	2700	2280	2640	2840					4940	5110
			2500	2800	2380	2740	2940					5020	5190
			2600	2900	2480	2840	3040					5100	5280
			2700	3000	2580	2940	3140			100		5190	5360
			2800	3100	2680	3040	3240					5270	5450
			2900	3200	2780	3140	3340					5360	5530
			3000	3300	2880	3240	3540			150		5440	5700
1900	2090	1900	1000	1310	870	1250						4090	
			1100	1410	970	1350						4180	
			1200	1510	1070	1450						4270	
			1300	1610	1170	1550						4360	
			1400	1710	1270	1650						4450	
			1500	1810	1370	1750	-			-		4540	-
			1600	1910	1470	1850						4630	
			1700	2010	1570	1950						4720	
			1800	2110	1670	2050						4810	
			1900	2210	1770	2150						4900	
			2000	2310	1870	2250		125	190		250	4990	
			2100	2410	1970	2350	2450					5080	5170
			2200	2510	2070	2450	2550			50		5170	5250
			2300	2610	2170	2550	2650					5250	5340
			2400	2710	2270	2650	2850					5340	5530
			2500	2810	2370	2750	2950					5430	5620
			2600	2910	2470	2850	3050					5520	5710
			2700	3010	2570	2950	3150			100		5610	5800
			2800	3110	2670	3050	3250					5700	5880
			2900	3210	2770	3150	3350					5790	5790
			3000	3310	2870	3250	3450			150		5880	6150

●張り出し長t4は農業土木事業協会型 浮力安全率1.1以上をベースとしたものです。●排水用の場合は水抜きがつきます。


●上記以外のサイズについてはお問い合わせください。




鉄筋コンクリート大型フリューム

h-2000

張り出し無しタイプ

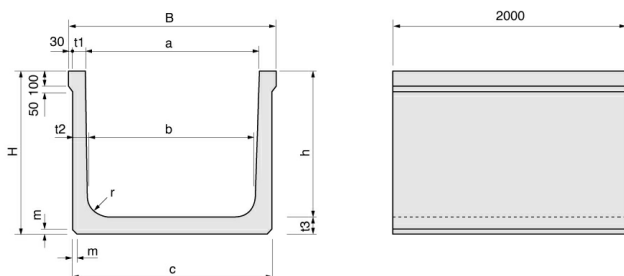

張り出し有りタイプ（浮力対応型）

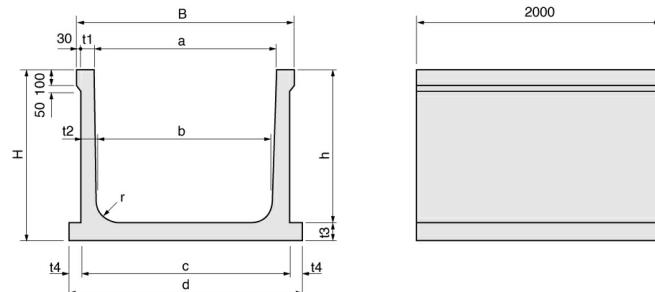

呼び名		寸 法 (mm)										参考質量 (kg)		
h (深) × a (幅)		H	h	a	B	b	c	d	t1	t2,t3	t4	r	張出し無し タイプ	張出し有り タイプ
2000	1000			1000	1310	870	1250						4240	
	1100			1100	1410	970	1350						4330	
	1200			1200	1510	1070	1450						4420	
	1300			1300	1610	1170	1550						4510	
	1400			1400	1710	1270	1650						4600	
	1500			1500	1810	1370	1750						4690	
	1600			1600	1910	1470	1850						4780	
	1700			1700	2010	1570	1950						4860	
	1800			1800	2110	1670	2050						4950	
	1900			1900	2210	1770	2150						5040	
	2000	2190	2000	2000	2310	1870	2250		125	190		250	5130	
	2100			2100	2410	1970	2350						5220	
	2200			2200	2510	2070	2450	2550					5310	5410
	2300			2300	2610	2170	2550	2650			50		5400	5490
	2400			2400	2710	2270	2650	2750					5490	5580
	2500			2500	2810	2370	2750	2950					5580	5760
	2600			2600	2910	2470	2850	3050					5670	5850
	2700			2700	3010	2570	2950	3150			100		5760	5940
	2800			2800	3110	2670	3050	3250					5850	6030
	2900			2900	3210	2770	3150	3350					5940	6120
	3000			3000	3310	2870	3250	3450					6030	6210

●張り出し長t4は農業土木事業協会型 浮力安全率1.1以上をベースとしたものです。●排水用の場合は水抜きがつきます。

●上記以外のサイズについてはお問い合わせください。

